

DA 2698

Insert ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.



- Customized kitchen design – fully integrated in 34 3/4 (880) in (mm) width
- Unique user convenience – Con@ctivity
- Powerful – ?? on the booster setting
- Energy-efficient and quiet
- Elegant and efficient – edge vented panel

EAN: 4002516023906 / Material number: 10876810 / Old Material Number: 28269855USA

<b>Construction type</b>	
Insert ventilation hood	•
<b>Operating modes</b>	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 19-P
<b>Design</b>	
Color	Stainless steel
Edge extraction	•
<b>Control panel</b>	
Miele@home	•
Electronic controls	•
Power levels (number excl. Intensive)	3
Programmable Intensive switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
<b>Efficiency and sustainability</b>	
PowerManagement system	•
ECO motor	•
<b>Cleaning convenience</b>	
Easy-to-clean CleanCover hood liner	•
<b>Filter system</b>	
Number of dishwasher-safe stainless-steel grease filters	2
<b>Lighting</b>	
LED	•
Number x W	4 x 3 W
Light intensity in Lx	650 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
<b>Blower</b>	
Dual-action blower	•
DC motor	•
<b>Extraction</b>	
Air throughput	Values upon request
<b>Safety</b>	
Safety shut-off	•
<b>Technical data</b>	
Canopy width in in.(mm)	34 3/4 (880)
Canopy height in in.(mm)	2 1/2 (63)
Canopy depth in in.(mm)	11 5/8 (293)
Minimum height above electric hobs in mm	24 1/8 (610)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	31 (14.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.36
Voltage in V	120

DA 2698

Insert ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.




EAN: 4002516023906 / Material number: 10876810 / Old Material Number: 28269855USA

Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
<b>Installation notes</b>	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
<b>Accessories supplied</b>	
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z
Non-return flap	•
<b>Optional accessories</b>	
OdorFree charcoal filter	Nein

DA 2698

Insert ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

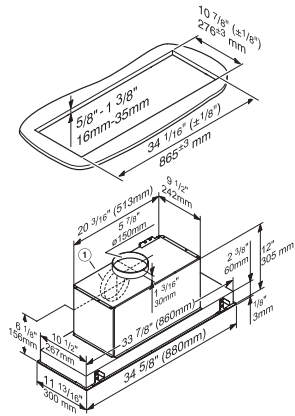

DA 2698 I- Integrated cooker hood (Installation drawing) – US

1) Vent connection alternatively to rear