


Split System Inverter Reverse Cycle air conditioner featuring wireless connectivity, DC fan motor with 12 fan speeds, concealed dimmable digital display, HEPA and ion filters, auto swing (up, down), LCD remote, DRED capable. 2.5kW cooling/3.2kW heating capacity & with 5.0 Energy Star Rating RRP AUS \$899.00



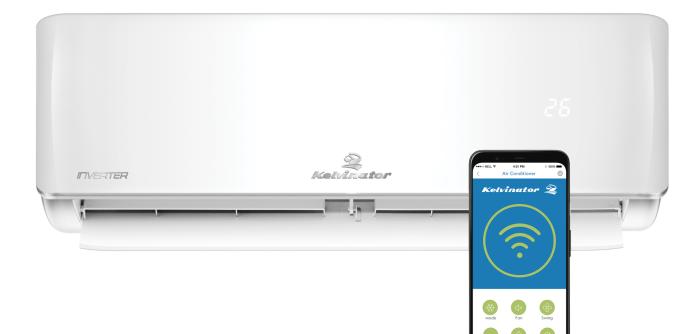

Product Details

FEATURES

Kelvinator Connect Wireless connectivity. Heating and cooling modes of operation Provides year round comfort Auto or Manual operation Easy to set and forget or retain full user control LCD backlit wireless remote control Easy access to all functionality combined with a large easy screen backlit to be clearly readable in all lighting conditions

Follow Me command Measures and controls the temperature where you are for personal comfort 24 hour timer Program your air conditioner to turn on and off automatically Auto restart In the event of an interruption in power supply the unit will restart with the same settings that were selected prior to the power outage

Inverter compressor technology Electronic compressor control for maximum energy efficiency and minimum noise

5 year parts and labour warranty

Auto Air Swing Air can be automatically directed up and down to distribute cooling or heating evenly Sleep mode Sleep mode automatically adjusts the temperature while you sleep for maximum comfort and minimum energy consumption

BENEFITS

Comfort & convenience at the touch of your hands Kelvinator Connect allows you to be smarter with your heating and cooling needs from any location with your smart device via the Kelvinator Home Comfort App. At your convenience, turn the unit on or off, change temperatures, control modes and adapt fan speeds to best meet your comfort needs.

Peace of mind

The additional Bio-HEPA and ion filtration is the ideal way to purify, sterilise and deodorise the air in your living areas





Superior comfort and control With DC inverter technology you'll enjoy greater comfort, control and energy efficiency all year round Easy to use One touch climate control is at your fingertips with a simpleto-use remote control

Easy to clean

The contemporary clean-face fascia not only looks good, it also minimises dust build-up on the front of the unit. Slim and compact, these air-conditioners are unobtrusive and will suit any interior style



Specifications

PRODUCT PROFILE

Domestic warranty details 5 (yrs)

Туре

reverse cycle

SPECIFICATIONS

Nominal horsepower	1.0
Capacity cool watts	2500
Capacity cool Btu/h	8500
Capacity Heat watts	3200
Capacity Heat Btu/h	10900
Current rating amps	9.5
Power Supply Connection Point	outdoor unit
Colour of fascia	White, Digital Display
Colour of fascia Compressor type	White, Digital Display rotary
Compressor type Indoor sound pressure dBA	rotary
Compressor type Indoor sound pressure dBA high setting Indoor sound pressure dBA	rotary 42





SPECIFICATIONS

Indoor air circulation max (ltr/s)	167
Ambient temperature range minimum	-15
Ambient temperature range maximum	50
Moisture removal ltr/hour	1.0
Energy star rating cooling	5.0
Energy star rating heating	5.0
Cooling EER	4.75
Heating COP	4.75
Refrigerant weight (g)	830
Refrigerant type	R32

OUTDOOR UNIT DIMENSIONS

Width (mm)	885
Height (mm)	554
Depth (mm)	365

INDOOR UNIT DIMENSIONS

Total width (mm)	802
Total height (mm)	297
Total depth (mm)	189



INSTALLATION REQUIREMENTS (PIPING AND

FEATURES

Features - Air Conditioners	remote control,manual operation,air swing auto up/down,auto restart,fan mode,auto mode,air direction	Gas pipe size	9.52
	control,cooling mode,dry mode,self diagnosis,room temperature display,Heating Mode,low pressure	Liquid pipe size	6.35
	detection,demand-response enabled,anti cold air function,Follow me,Silence,Sleep mode,Turbo,Wireless enabled	Maximum piping length vertical	10
Filtration	dust,hepa,Ion Filter	Maximum piping length	25
Remote control type	LCD,back lit	Additional refrigerant required supplied charge length (g/m)	15
Timer	24 hour	Maximum pipe length with supplied charge	5
Anti corrosion treatment	gold shield	Wires connecting indoor unit to outdoor unit	4
Fan speeds	low,medium,high,turbo,Auto,Silent		
Display/ indicators	temperature,defrost		

WIRING)

INDOOR UNIT PACKED DIMENSIONS

Shipping Volume (m3)	0.09
Shipping Weight (Kg)	11.3
Pack Dimensions Width (mm)	875

OUTDOOR UNIT PACKED DIMENSIONS

Shipping Volume (m3)	0.22
Shipping Weight (Kg)	35.9
Pack Dimensions Width (mm)	920



INDOOR UNIT PACKED DIMENSIONS

Pack Dimension Height (mm)	375
Pack Dimension Depth (mm)	285

OUTDOOR UNIT PACKED DIMENSIONS

Pack Dimension Height (mm)	615	
Pack Dimension Depth (mm)	390	

STUFFING QUANTITIES

20ft	76
40ft	160
40ft HC	192



Terms and Conditions

IMPORTANT

This is a guide of product dimensions only. For complete installation instructions, refer to the manual provided with product.

PRODUCT INFORMATION

The descriptors and illustrations in this publication apply to the specific products and models described as at the date of issue. Under our policy of continuous productdevelopment, product specifications may change without notice. Prospective purchasers should therefore check with their retailer to ensure this publication correctly describes theproducts that are being offered for sale. All information supplied is to be used for general reference purposes only and is on the understanding that Electrolux Home Products PtyLtd (Australia) and Electrolux (NZ) Ltd (New Zealand) will not be liable for any loss, liability or damage of whatever kind arising as a result of reliance on such information. Colours ofproducts illustrated are as close as printing limitations allow. Electrolux will at all times comply with its obligations pursuant to law including Trade Practices (Australian Consumer Law) Act and Regulations.

WARRANTY

This warranty only applies to Appliances purchased and used in Australia or New Zealand and used in normal domestic applications and is in addition to (and does not exclude, restrict, or modify in any way) any non-excludable statutory warranties in Australia or New Zealand. All warranties are subject to the conditions set out in the warranty card accompanying the product when purchased.

ELECTROLUX HOME PRODUCTS AUSTRALIA

telephone: 1300 363 640 fax: 1800 350 067 email: customercare@electrolux.com.au web: www.electrolux.com.au

ELECTROLUX HOME PRODUCTS NEW ZEALAND telephone: 09 573 2230 fax: 09 573 2221 email: customercare@electrolux.co.nz web: www.electrolux.co.nz